


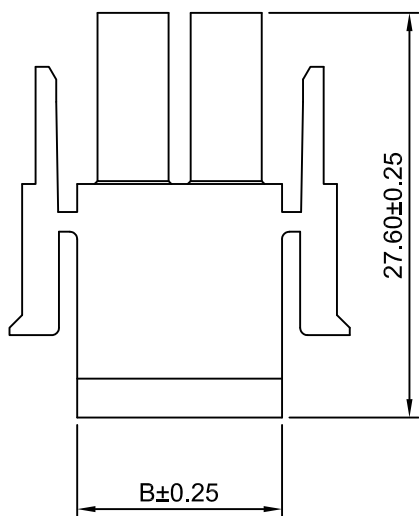
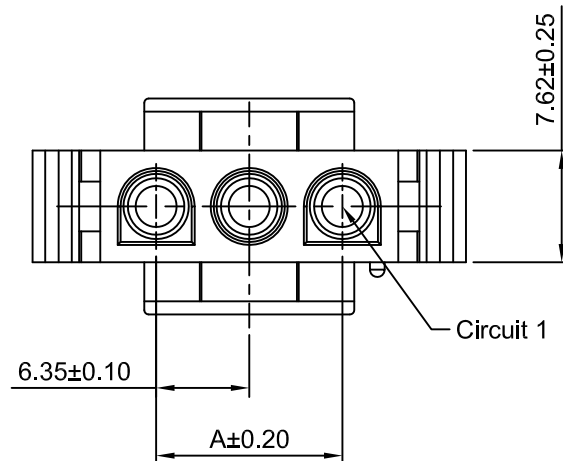


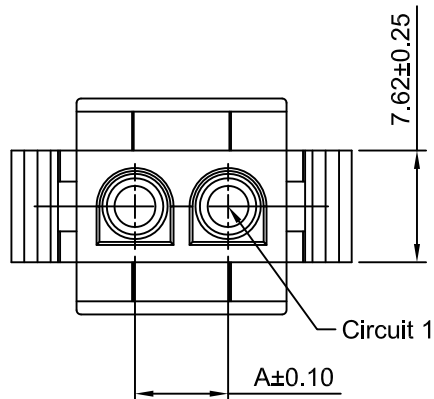

2P

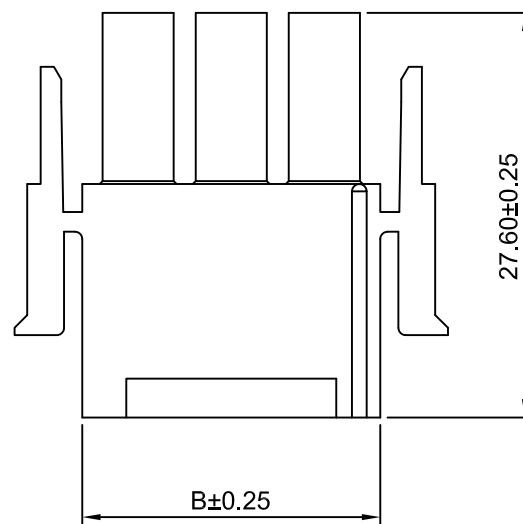

3P~10P

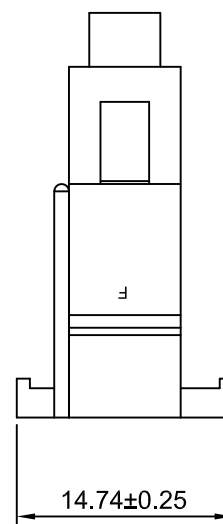

Ordering Information:

C6351HFA-XP - *** - **
1 2 3

- Part NO.
- Material:
(Blank):Nylon 66,UL94V-2(Natural)
V0:Nylon 66,UL94V-0(White)
- Color:
(Blank): see section 2 material
BR:Brown
RD:Red
OR:Orange
YL:Yellow
GN:Green
BL:Blue
GY:Gray
BK:Black

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 3.5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 5000V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	6.35	13.97	7P	38.10	45.72
3P	12.70	20.32	8P	44.45	52.07
4P	19.05	26.67	9P	50.80	58.42
5P	25.40	33.02	10P	57.15	64.77
6P	31.75	39.37			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale	Sheet	TITLE 6.35mm PITCH SINGLE ROW HOUSING	
mm		2:1	1 of 1		
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO. C6351HFA-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
				REV A1	

A1	CHANGE THE DRAWING	2023.03.22
A0	NEW RELEASE	2015.04.25
REV	DESCRIPTION	DATE