

Ordering Information:

C6351HM-XP - $\frac{***}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-2(Natural)

V0:Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC
60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 material

BR:Brown

RD:Red

OR:Orange






YL:Yellow

GN:Green


BL:Blue

GY:Gray


BK:Black

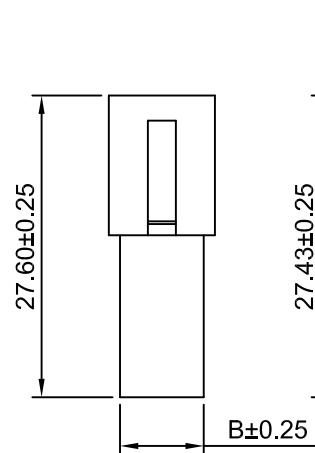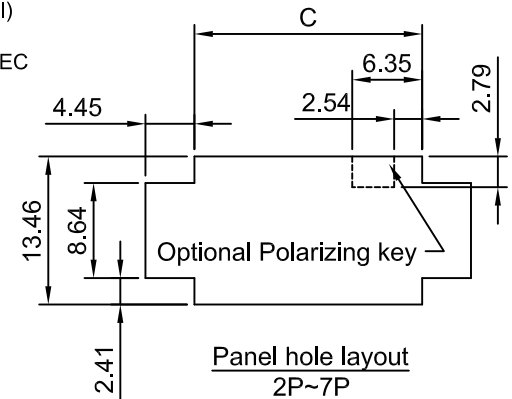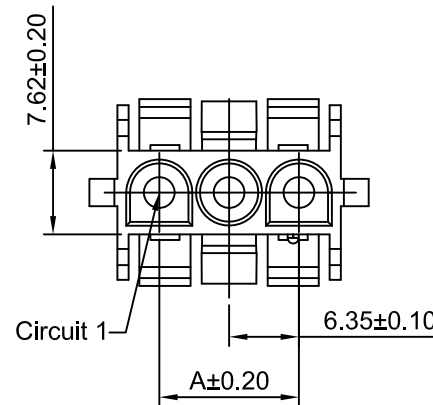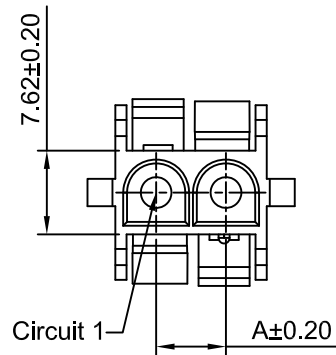


1P

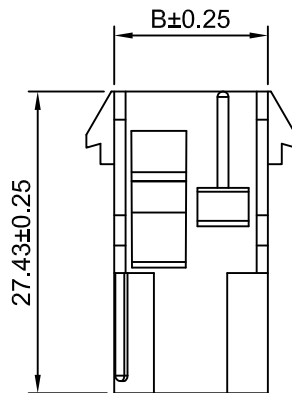

2P

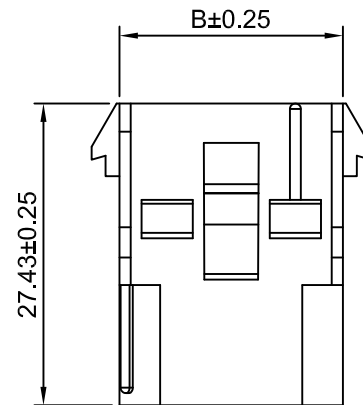

3P~7P



SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
1P	---	7.62	---	5P	25.40	33.02	33.40
2P	6.35	13.97	14.35	6P	31.75	39.37	39.75
3P	12.70	20.32	20.70	7P	38.10	45.72	46.10
4P	19.05	26.67	27.05				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
Draw By:		Approved :
Dlankul Wan		Jack Yln

Title :
6.35mm PITCH
SINGLE ROW HOUSING

A1	CHANGE THE DRAWING	2019.07.04
A0	NEW RELEASE	2015.04.25
REV	DESCRIPTION	DATE

General Tolerance	
x.xx±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : C6351HM-XP	REV A1
----------------------	--------