


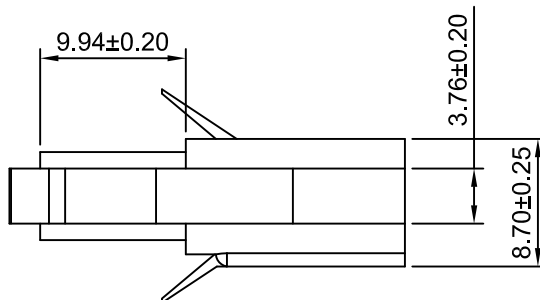

Current Rating: 13A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 3.5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 5000V AC/minute
Material: Nylon 66,UL94V-2 or UL94V-0

Technical drawing of a mechanical part, showing front and side views with dimensions.

Front View (Left):

- Overall width: 10.11 ± 0.20
- Overall height: 13.11 ± 0.20
- Top flange thickness: 1.07
- Bottom flange thickness: 3.00 ± 0.10
- Central hole diameter: 7.11 ± 0.10
- Radius of the central hole: $R1.70 \pm 0.50$

Side View (Right):

- Overall width: 24.80 ± 0.25
- Overall height: 27.68 ± 0.50
- Distance from top flange to the start of the main body: 14.86 ± 0.20
- Distance from the start of the main body to the bottom flange: 19.20 ± 0.20

A1	CHANGE THE DRAWING	2020.09.01
A0	NEW RELEASE	2009.12.21
REV	DESCRIPTION	DATE