
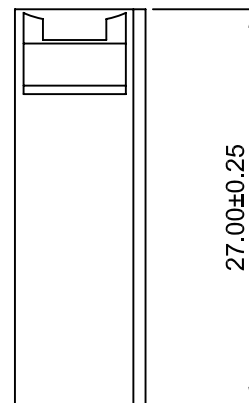


SPECIFICATIONS:

Current Rating: 13A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 3.5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 5000V AC/minute
Material: Nylon 66,UL94V-2 or UL94V-0

Ordering Information & Dimensions

PART NO.	Color	Material
2P	Natural	Nylon66(V2)
2P-V0	White	Nylon66(V0)
2P-BK	Black	Nylon66(V2)
2P-GY	Gray	Nylon66(V2)
2P-VI	Violet	Nylon66(V2)
2P-GN	Green	Nylon66(V2)
2P-YL	Yellow	Nylon66(V2)
2P-OR	Orange	Nylon66(V2)
2P-BR	Brown	Nylon66(V2)

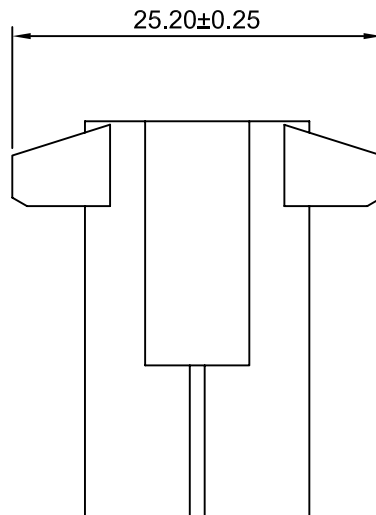

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:	Approved :	
Diankui Wan	Jack Yin	

Title :
7.11mm PITCH

Housing

REV	DESCRIPTION	DATE	General Tolerance	ANGLE±
A1	CHANGE THE DRAWING	2018.10.13	x.x≤0.25	
A0	NEW RELEASE	2012.12.13	x.xx≤0.20	
			x.xxx≤0.15	

DRAW NO : C7110HM-2P

REV
A0