

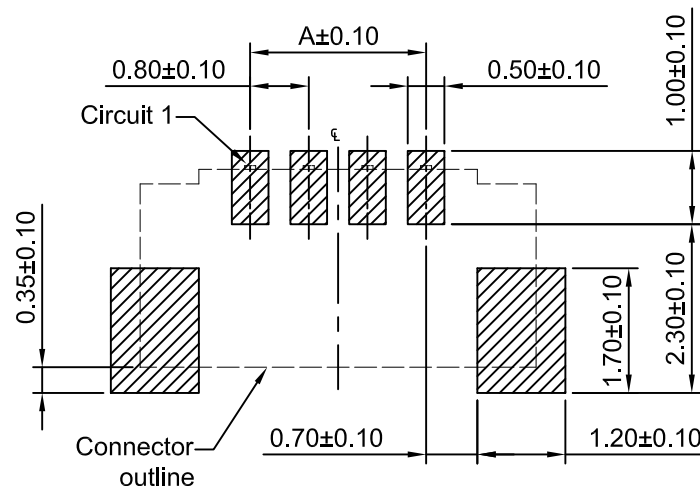
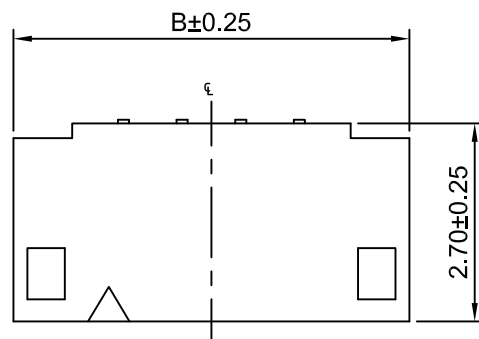


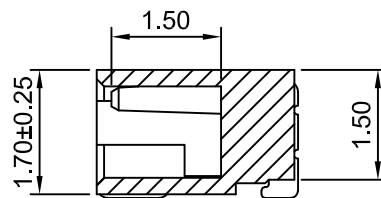

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

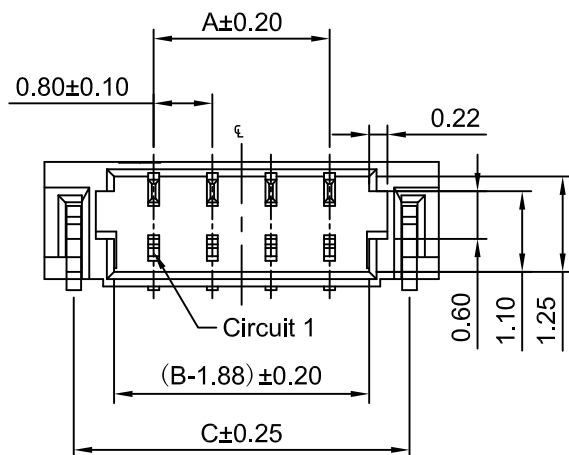

SPECIFICATIONS:

Current rating: 1A AC,DC (Max.)
Voltage rating: 30V AC,DC
Temperature range: -40°C ~ +105°C
Contact resistance: 20mΩ Max.
Insulation resistance: 100MΩ Min.
Withstanding voltage: 200V AC/minute
Terminal: Phosphor Bronze/Gold over Nickel
Solder Tabs: Brass/Gold over Nickel
Housing: LCP, UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
D0801WR-S-2P-LCP-G	0.80	3.78	2.97
D0801WR-S-3P-LCP-G	1.60	4.58	3.77
D0801WR-S-4P-LCP-G	2.40	5.38	4.57
D0801WR-S-5P-LCP-G	3.20	6.18	5.37
D0801WR-S-6P-LCP-G	4.00	6.98	6.17
D0801WR-S-7P-LCP-G	4.80	7.78	6.97
D0801WR-S-8P-LCP-G	5.60	8.58	7.77
D0801WR-S-9P-LCP-G	6.40	9.38	8.57
D0801WR-S-10P-LCP-G	7.20	10.18	9.37
D0801WR-S-11P-LCP-G	8.00	10.98	10.17
D0801WR-S-12P-LCP-G	8.80	11.78	10.97
D0801WR-S-13P-LCP-G	9.60	12.58	11.77
D0801WR-S-14P-LCP-G	10.40	13.38	12.57
D0801WR-S-15P-LCP-G	11.20	14.18	13.37
D0801WR-S-16P-LCP-G	12.00	14.98	14.17
D0801WR-S-17P-LCP-G	12.80	15.78	14.97
D0801WR-S-18P-LCP-G	13.60	16.58	15.77
D0801WR-S-19P-LCP-G	14.40	17.38	16.57
D0801WR-S-20P-LCP-G	15.20	18.18	17.37

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 0.80mm PITCH 90° WAFER - SMD TYPE	
mm	10:1	1 of 1		
DRWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. D0801WR-S-XP-LCP-G	REV A3
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				
				