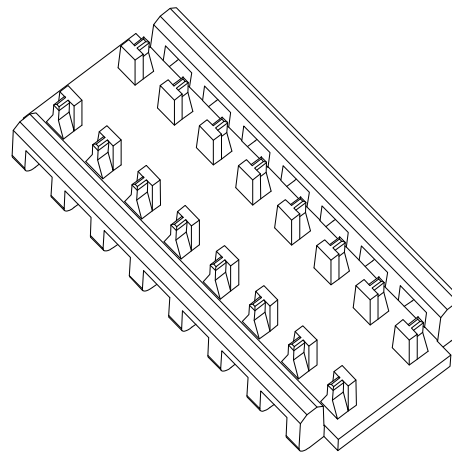
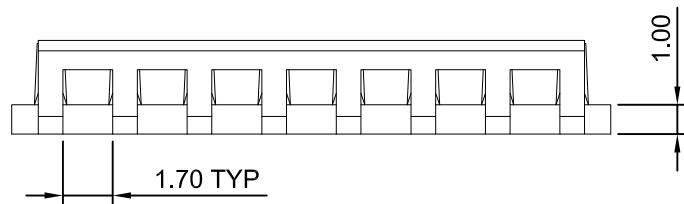
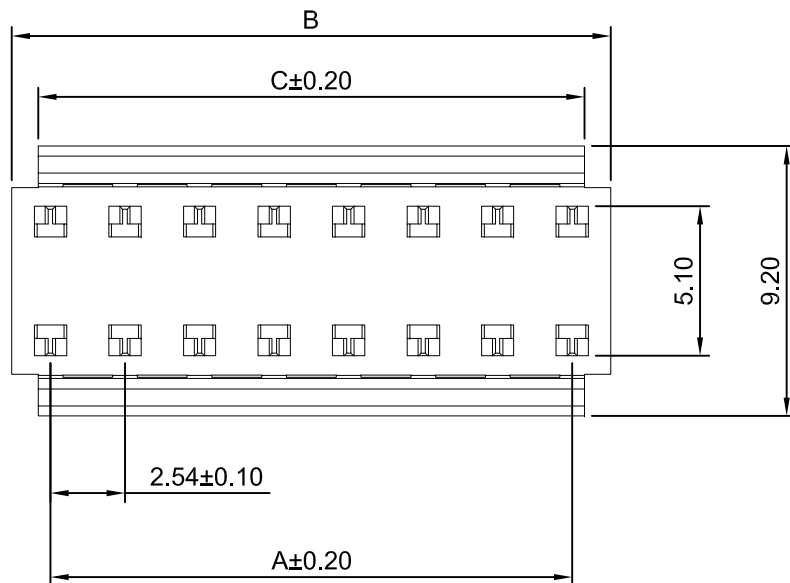


SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
D2541C-2P	2.54	5.18	3.36
D2541C-3P	5.08	7.72	5.90
D2541C-4P	7.62	10.26	8.44
D2541C-5P	10.16	12.80	10.98
D2541C-6P	12.70	15.34	13.52
D2541C-7P	15.24	17.88	16.06
D2541C-8P	17.78	20.42	18.60
D2541C-9P	20.32	22.96	21.14
D2541C-10P	22.86	25.50	23.68
D2541C-11P	25.40	28.04	26.22
D2541C-12P	27.94	30.58	28.76
D2541C-13P	30.48	33.12	31.30
D2541C-14P	33.02	35.66	33.84
D2541C-15P	35.56	38.20	36.38
D2541C-16P	38.10	40.74	38.92
D2541C-17P	40.64	43.28	41.46
D2541C-18P	43.18	45.82	44.00
D2541C-19P	45.72	48.36	46.54
D2541C-20P	48.26	50.90	49.08
D2541C-21P	50.80	53.44	51.62
D2541C-22P	53.34	55.98	54.16
D2541C-23P	55.88	58.52	56.70
D2541C-24P	58.42	61.06	59.24

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	2.54mm FEED-THRU STRAIN RELIEF COVERS
DRAWN	CHK'D	APPR	
Chengbiao Ye	Dianhui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.50 x.xx±0.38 x.xxx±0.20 ANGLES ±1°			DRAWING NO.
			D2541C-XP
			REV A0