
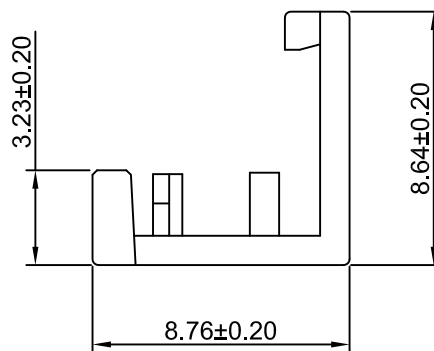
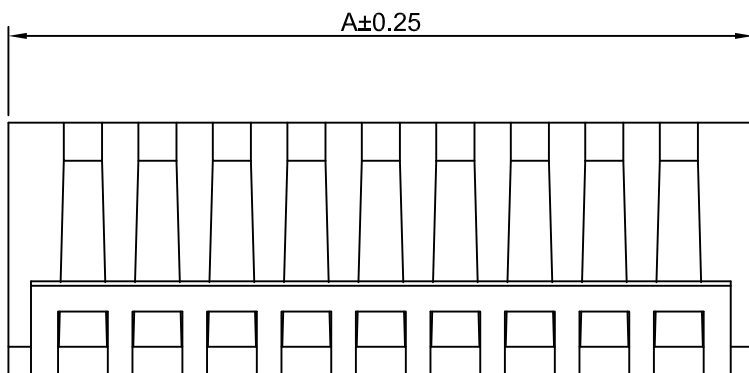


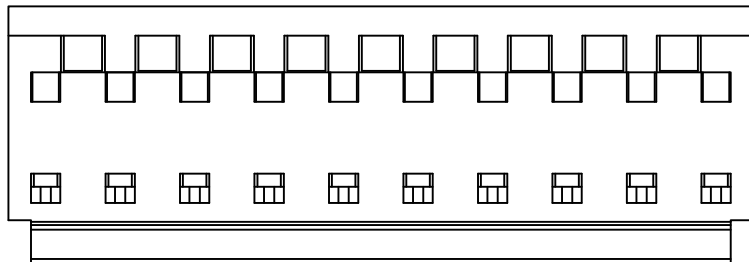

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66, UL94V-2

Color: White

Ordering Information & Dimensions

Circuits	Dimensions(mm)	Circuits	Dimensions(mm)
	A		A
2P	5.08	14P	35.56
3P	7.62	15P	38.10
4P	10.16	16P	40.64
5P	12.70	17P	43.18
6P	15.24	18P	45.72
7P	17.78	19P	48.26
8P	20.32	20P	50.80
9P	22.86	21P	53.34
10P	25.40	22P	55.88
11P	27.94	23P	58.42
12P	30.48	24P	60.96
13P	33.02		

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.54mm Feed-Thru Strain Relief Covers	
mm	4:1	1 of 1		
Draw BY: Halsen LI		Approved : Jack Yin		
General Tolerance x.xx≤0.25 x.xxx≤0.20 x.xxxx≤0.15		THIRD ANGLE PROJECTION 	DRAWING NO. D2541L-XP	REV A0