


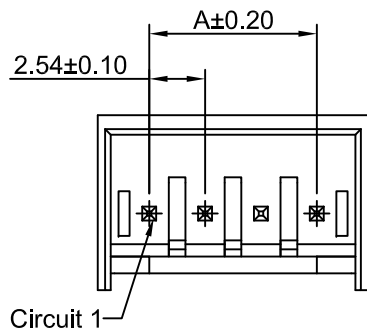

Ordering Information:
D2541WVA-F-XP - **
1 2





1.Part No.

2.Finish:


(Blank):Brass/Tin over Nickel

G:Brass/Gold over Nickel(1u")

G30:Brass/Gold over Nickel(30u")

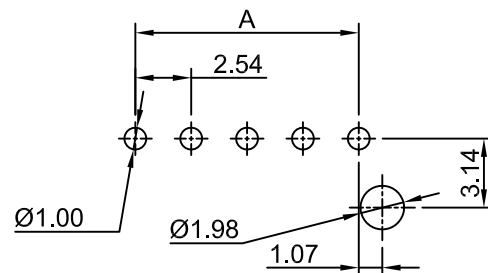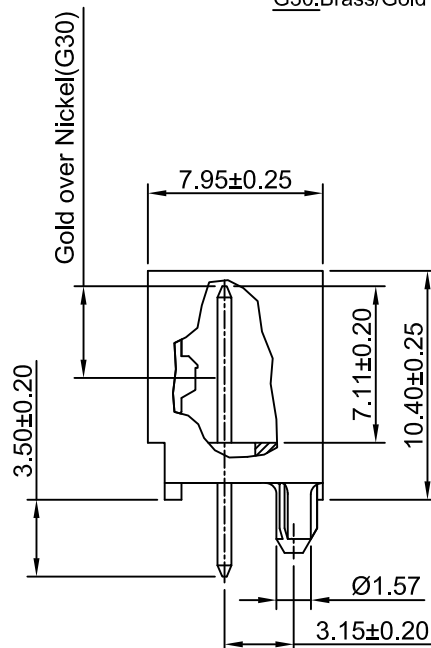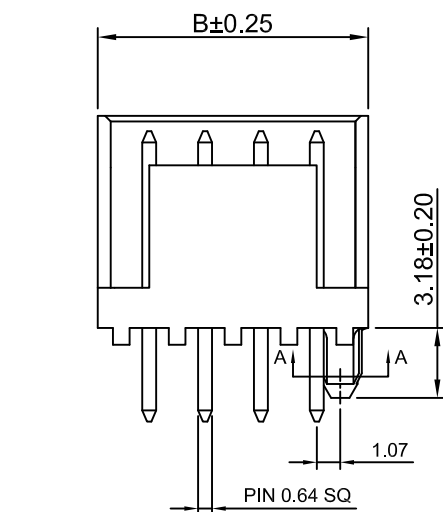

P.C.B LAYOUT
TOLERANCE:±0.05



SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 46, UL 94V-0 (Black)

Pin Material:Brass/Tin over Nickel

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
D2541WVA-F-2P	2.54	7.21
D2541WVA-F-3P	5.08	9.75
D2541WVA-F-4P	7.62	12.29
D2541WVA-F-5P	10.16	14.83
D2541WVA-F-6P	12.70	17.37
D2541WVA-F-7P	15.24	19.91
D2541WVA-F-8P	17.78	22.45
D2541WVA-F-9P	20.32	24.99
D2541WVA-F-10P	22.86	27.53
D2541WVA-F-11P	25.40	30.07
D2541WVA-F-12P	27.94	32.61
D2541WVA-F-13P	30.48	35.15
D2541WVA-F-14P	33.02	37.69
D2541WVA-F-15P	35.56	40.23
D2541WVA-F-16P	38.10	42.77
D2541WVA-F-17P	40.64	45.31
D2541WVA-F-18P	43.18	47.85
D2541WVA-F-19P	45.72	50.39
D2541WVA-F-20P	48.26	52.93
D2541WVA-F-21P	50.80	55.47
D2541WVA-F-22P	53.34	58.01
D2541WVA-F-23P	55.88	60.55
D2541WVA-F-24P	58.42	63.09

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.54mm IDC VERTICAL WAFER		
DRWN	CHK'D	APPR			
Wenmin Luo	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			D2541WVA-F-XP		A0