




P.C.B LAYOUT

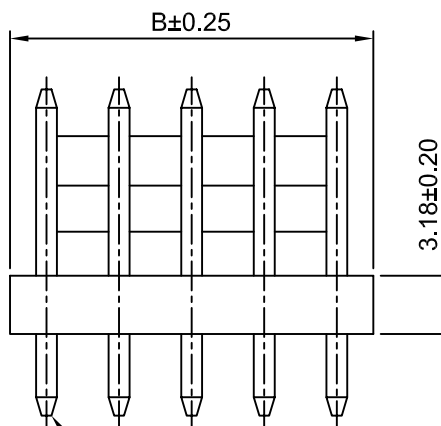


PIN 1.14 SQ

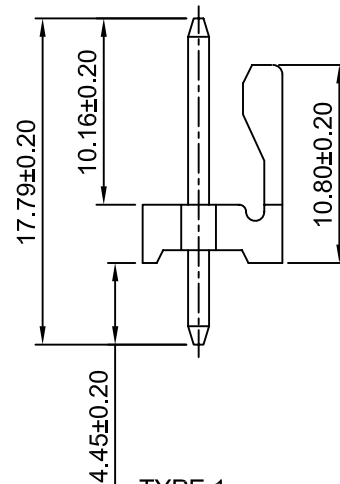

TYPE 1

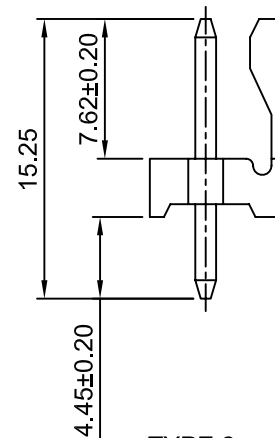

TYPE 2

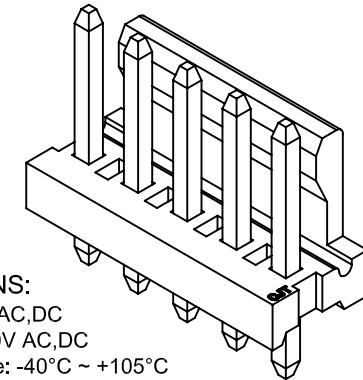

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Material: Nylon66 UL 94V-0 (Natural)
PIN Material: Brass/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	14P	51.48	55.44
3P	7.92	11.88	15P	55.44	59.40
4P	11.88	15.84	16P	59.40	63.36
5P	15.84	19.80	17P	63.36	67.32
6P	19.80	23.76	18P	67.32	71.28
7P	23.76	27.72	19P	71.28	75.24
8P	27.72	31.68	20P	75.24	79.20
9P	31.68	35.64	21P	79.20	83.16
10P	35.64	39.60	22P	83.16	87.12
11P	39.60	43.56	23P	87.12	91.08
12P	43.56	47.52	24P	91.08	95.04
13P	47.52	51.48			

Ordering Information:

D3961WV-XP-H - *
1 2

1.Part No.

2.Type:

(Blank):TYPE 1

L:TYPE 2

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:		Approved :
Jack Yin		GONGYB

Title :

3.96mm pitch

180° Wafer

General Tolerance

x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

DRAW NO : D3961WV-XP-H-* REV A0

A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE