
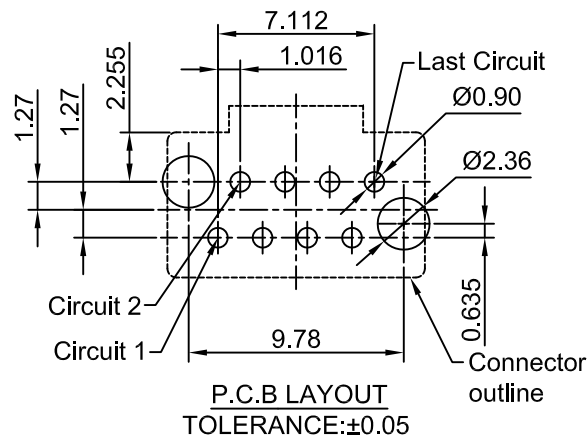

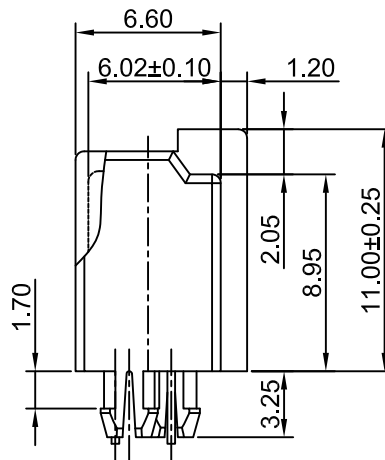


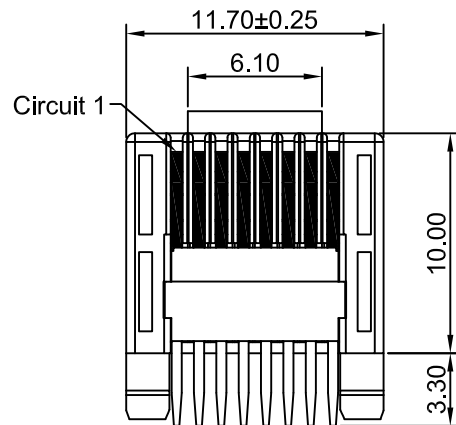

Ordering Information:

RJ45-F-8P-8C-6U-CJ- ***

1 2

1.Part NO.

2.Finish:

(Blank): Gold over Nickel and Tin over Nickel



GT6: Gold over Nickel(Au:6μin[0.15μm] Min,Tin Plated,Other Area)

G15: Gold over Nickel(Au:15μin[0.38μm] Min,Tin Plated,Other Area)

GT30: Gold over Nickel(Au:30μin[0.76μm] Min,Tin Plated,Other Area)

GT50: Gold over Nickel(Au:50μin[1.27μm] Min,Tin Plated,Other Area)

T: Tin over Nickel



SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: Nylon 9T,UL94V-0(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	RJ45 WAFER	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.38			RJ45-F-8P-8C-6U-CJ	A0
x.xx±0.25				
x.xxx±0.15				
ANGLES ±1°				

A0	NEW RELEASE	2024.01.29
REV	DESCRIPTION	DATE