

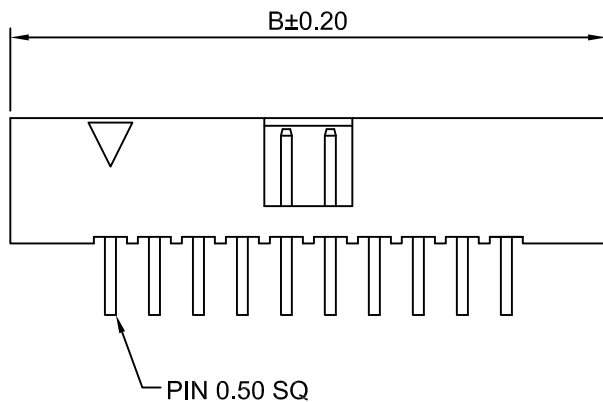
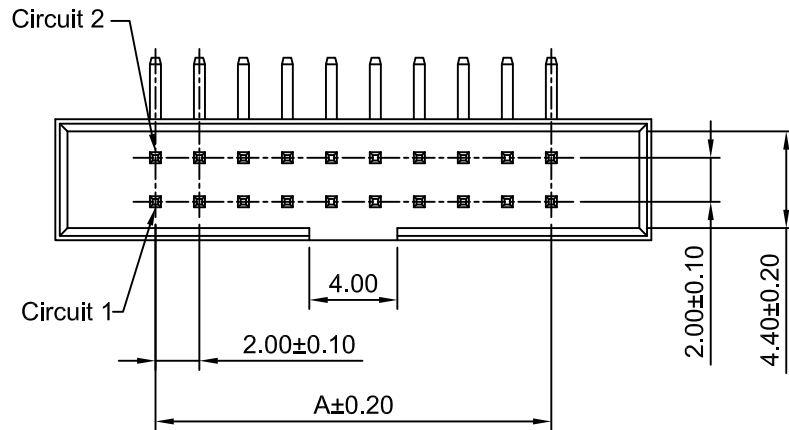


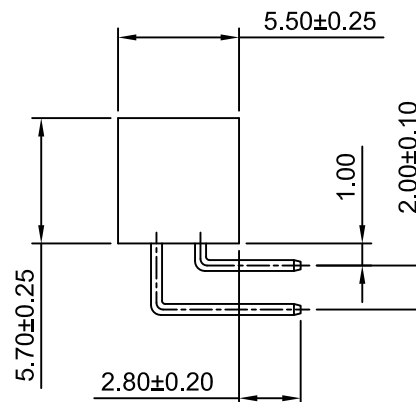


Ordering Information:

- A2005WR-N-2xXP - *** _ ***
- 1 2 3
- 1.Part NO.
2.Material:
(Blank): PBT,UL94V-0(Black)
6T : Nylon 6T,UL94V-0(Black)
3.Finish:
(Blank): Gold over Nickel
T: Tin over Nickel



SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass



Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x4P	6.00	15.30	2x20P	38.00	47.30
2x5P	8.00	17.30	2x21P	40.00	49.30
2x6P	10.00	19.30	2x22P	42.00	51.30
2x7P	12.00	21.30	2x23P	44.00	53.30
2x8P	14.00	23.30	2x24P	46.00	55.30
2x9P	16.00	25.30	2x25P	48.00	57.30
2x10P	18.00	27.30	2x26P	50.00	59.30
2x11P	20.00	29.30	2x27P	52.00	61.30
2x12P	22.00	31.30	2x28P	54.00	63.30
2x13P	24.00	33.30	2x29P	56.00	65.30
2x14P	26.00	35.30	2x30P	58.00	67.30
2x15P	28.00	37.30	2x31P	60.00	69.30
2x16P	30.00	39.30	2x32P	62.00	71.30
2x17P	32.00	41.30	2x33P	64.00	73.30
2x18P	34.00	43.30	2x34P	66.00	75.30
2x19P	36.00	45.30			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH RIGHT-ANGLE DUAL ROW BOX HEADER	
DRAWN	CHK'D	APPR	DRAWING NO.	
Chengbiao Ye	Djankui Wan	Jack Yin	A2005WR-N-2xXP	
General Tolerances		THIRD ANGLE PROJECTION	REV	
A1	CHANGE THE DRAWING	2023.03.14	A1	
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		