
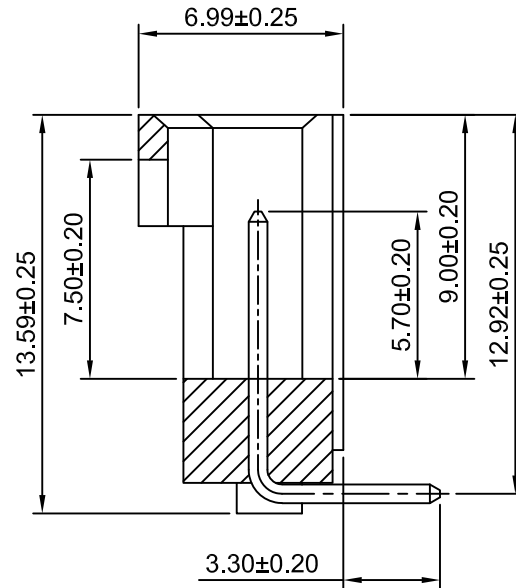
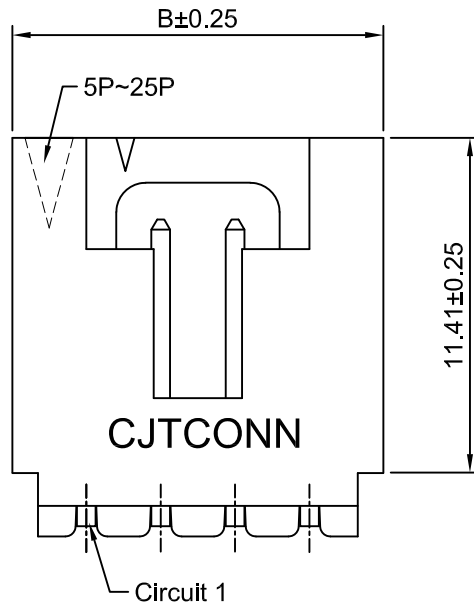
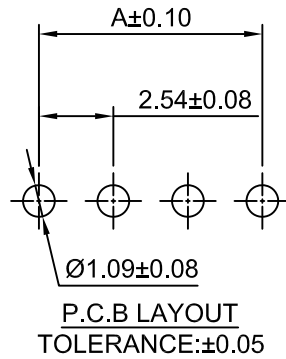


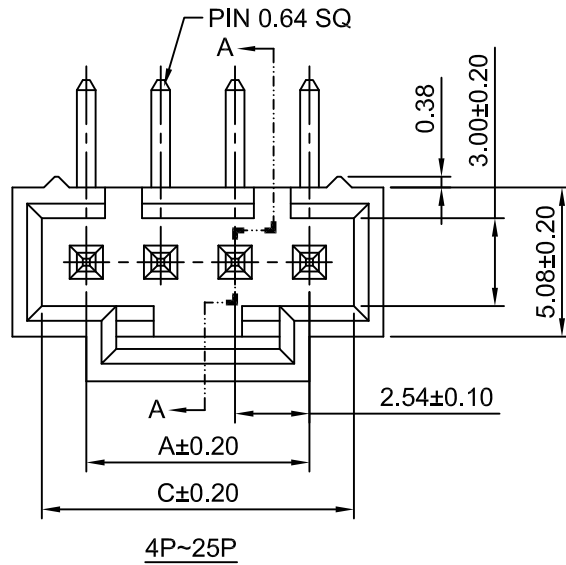

Ordering Information:

A2547WR-XP - *** - *** - ***
1 2 3 4

1.Part No.

2.Material:

(Blank): PBT,UL94V-0

66: Nylon 66,UL94V-0

9T: Nylon 9T,UL94V-0

LCP: LCP,UL94V-0

3.Color:

(Blank): Black WH:White

RD:Red YL:Yellow

BL:Blue GN:Green

4.Finish:

(Blank): Gold over Nickel

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 1500V AC/minute

Pin Material: Brass


Material: PBT,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2547WR-2P	2.54	7.62	5.52
A2547WR-3P	5.08	10.16	8.06
A2547WR-4P	7.62	12.70	10.60
A2547WR-5P	10.16	15.24	13.14
A2547WR-6P	12.70	17.78	15.68
A2547WR-7P	15.24	20.32	18.22
A2547WR-8P	17.78	22.86	20.76
A2547WR-9P	20.32	25.40	23.30
A2547WR-10P	22.86	27.94	25.84
A2547WR-11P	25.40	30.48	28.38
A2547WR-12P	27.94	33.02	30.92
A2547WR-13P	30.48	35.56	33.46
A2547WR-14P	33.02	38.10	36.00
A2547WR-15P	35.56	40.64	38.54
A2547WR-16P	38.10	43.18	41.08
A2547WR-17P	40.64	45.72	43.62
A2547WR-18P	43.18	48.26	46.16
A2547WR-19P	45.72	50.80	48.70
A2547WR-20P	48.26	53.34	51.24
A2547WR-21P	50.80	55.88	53.78
A2547WR-22P	53.34	58.42	56.32
A2547WR-23P	55.88	60.96	58.86
A2547WR-24P	58.42	63.50	61.40
A2547WR-25P	60.96	66.04	63.94



2P



3P

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2021.11.25
A4	CHANGE THE DRAWING	2021.10.13
A3	CHANGE THE DRAWING	2020.06.19
A2	ADD THE SIZE C	2019.03.08
A1	CHANGE THE DRAWING	2018.01.30
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	4:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x,xx±0.25		
x,xxx±0.20		
x,xxxx±0.15		
ANGLES ±1°		

TITLE	
2.54mm PITCH 90° SINGLE ROW DIP WAFER	
DRAWING NO.	REV A5
A2547WR-XP	