

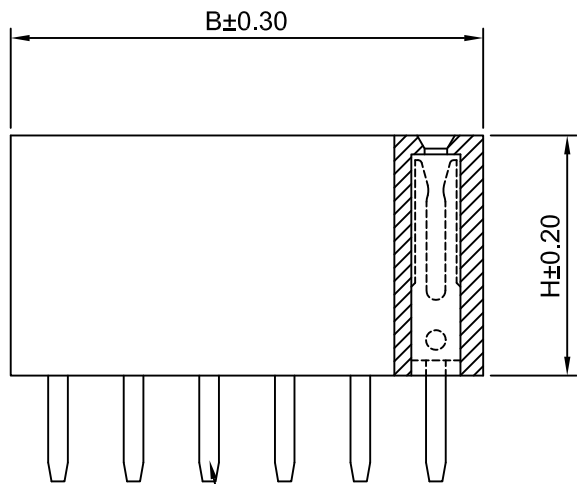


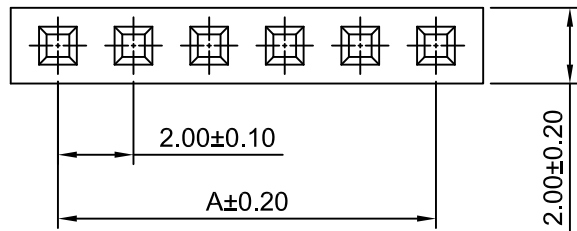

Pin 0.50x0.40

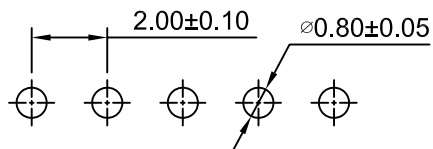

P C B LAYOUT

Ordering Information:

A2005HWV-XP-Y - $\frac{***}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$

1.Part No.

2.Size(H):

(Blank): 6.35mm(L:2.8mm)


H65: 6.50mm(L:3.00mm)

3.Material:

(Blank): PBT,UL94V-0

6T: Nylon 6T,UL94V-0

GWT: Nylon 6T,UL94V-0,GWT 750°C



SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Gold over Nickel

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B		A	B
2P	2.00	4.50	15P	28.00	30.50	28P	54.00	56.50
3P	4.00	6.50	16P	30.00	32.50	29P	56.00	58.50
4P	6.00	8.50	17P	32.00	34.50	30P	58.00	60.50
5P	8.00	10.50	18P	34.00	36.50	31P	60.00	62.50
6P	10.00	12.50	19P	36.00	38.50	32P	62.00	64.50
7P	12.00	14.50	20P	38.00	40.50	33P	64.00	66.50
8P	14.00	16.50	21P	40.00	42.50	34P	66.00	68.50
9P	16.00	18.50	22P	42.00	44.50	35P	68.00	70.50
10P	18.00	20.50	23P	44.00	46.50	36P	70.00	72.50
11P	20.00	22.50	24P	46.00	48.50	37P	72.00	74.50
12P	22.00	24.50	25P	48.00	50.50	38P	74.00	76.50
13P	24.00	26.50	26P	50.00	52.50	39P	76.00	78.50
14P	26.00	28.50	27P	52.00	54.50	40P	78.00	80.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	Title : 2.00mm Pitch 180° Single Row Female Header	
mm	5:1	1 of 1		
Draw By:		Approved :		
Tony Su		Jack Yin		
General Tolerance				
x.xx±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 	DRAW NO : A2005HWV-XP-Y	
			REV A0	