
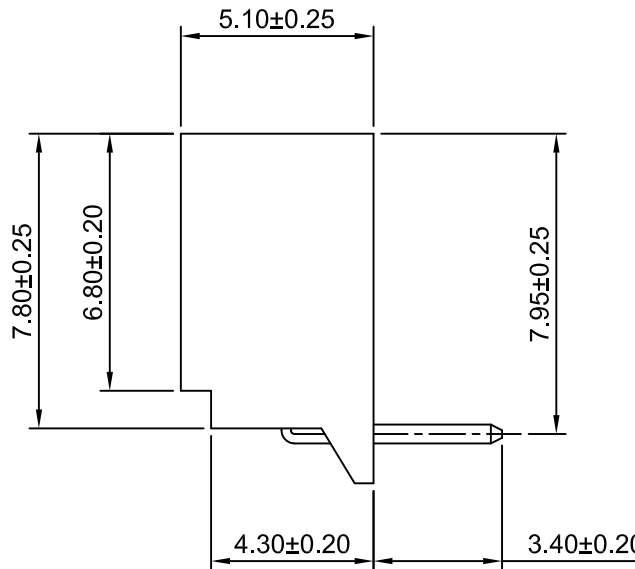
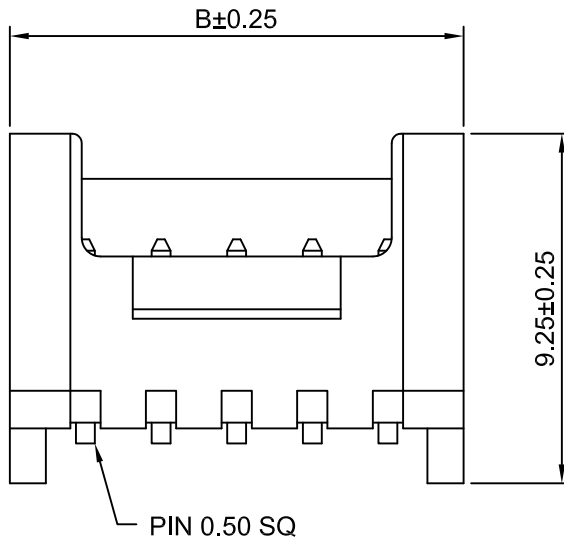
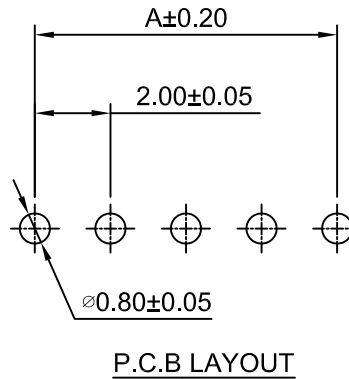


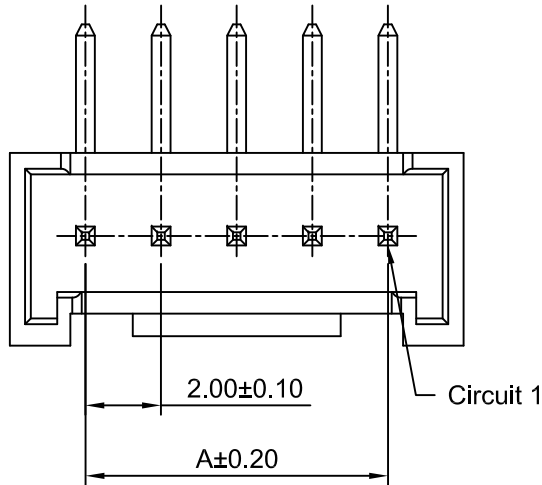

Ordering Information:

A2008WR-XP - $\frac{**}{1} - \frac{***}{2} - \frac{***}{3} - \frac{***}{4}$

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0, GWT 750°C

3.Color:

(blank):White

BL: Blue

BK: Black

RD: Red

YL: Yellow


GN: Green

GY: Gray

4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	10P	18.00	22.00
3P	4.00	8.00	11P	20.00	24.00
4P	6.00	10.00	12P	22.00	26.00
5P	8.00	12.00	13P	24.00	28.00
6P	10.00	14.00	14P	26.00	30.00
7P	12.00	16.00	15P	28.00	32.00
8P	14.00	18.00	16P	30.00	34.00
9P	16.00	20.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

A1	CHANGE THE SIZE	2019.06.28
A0	NEW RELEASE	2019.05.31
REV	DESCRIPTION	DATE

Title :		2.00mm Pitch	
		90° Wafer	
DRAW NO :		A2008WR-XP	REV A1