
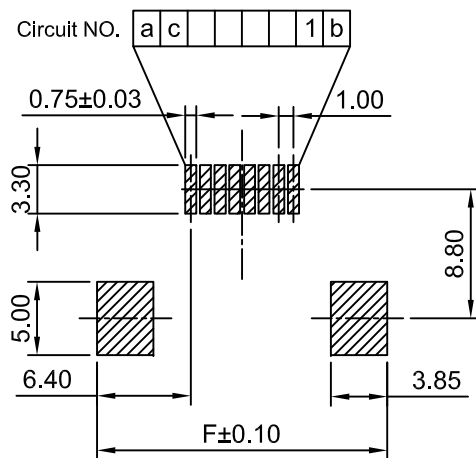
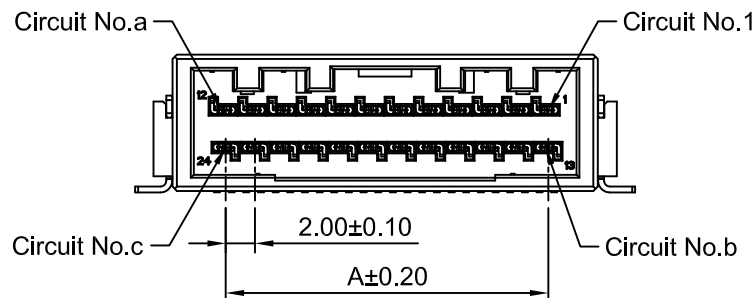


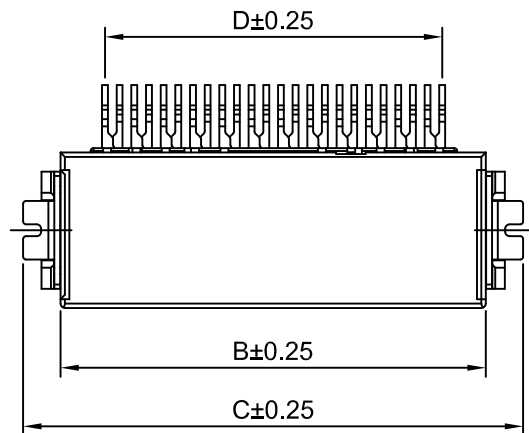

P.C.B LAYOUT
TOLERANCE:±0.05

Odering Information:

A2009WRC-S-2xXP - ***
1 2



1.Part NO.

2.Finish:

(Blank):Gold over Nickel(1u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

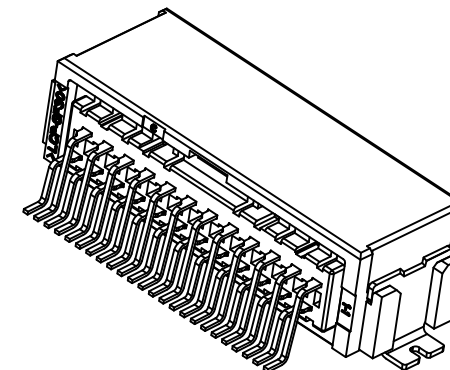

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 8mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Copper Alloy

Solder tabs: Brass/Tin over Nickel





Material: LCP+30%GF,UL94V-0(Black)

Ordering Information & Dimensions


Part NO.	Dimensions(mm)			
	A	B	C	D
A2009WRC-S-2x4P	6.00	13.00	18.10	7.00
A2009WRC-S-2x6P	10.00	17.00	22.10	11.00
A2009WRC-S-2x12P	22.00	29.00	34.10	23.00

CJTconn CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	2.00mm PITCH RIGHT-ANGLE DUAL ROW WAFER -SMD TYPE	
DRAWN	CHK'D	APPR	DRAWING NO.	
Haisen Li	Diankui Wan	Jack Yin	A2009WRC-S-2xXP	
General Tolerances			THIRD ANGLE PROJECTION	
A1 CHANGE THE DRAWING 2023.04.18			REV A1	
A0 NEW RELEASE 2021.09.19				
REV DESCRIPTION DATE				

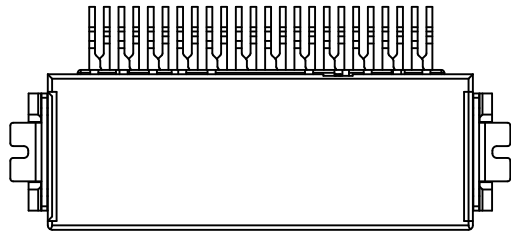

2x12P



2x6P



2x4P

A1	CHANGE THE DRAWING	2023.04.18
A0	NEW RELEASE	2021.09.19
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	2 of 2		
DRAWN	CHK'D	APPR	2.00mm PITCH RIGHT-ANGLE DUAL ROW WAFER -SMD TYPE	
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2009WRC-S-2xXP	REV A1
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				