


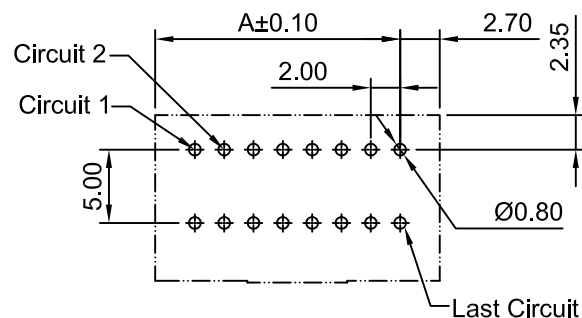
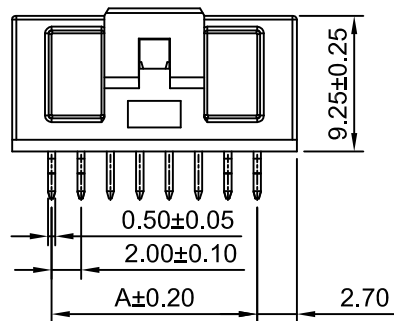


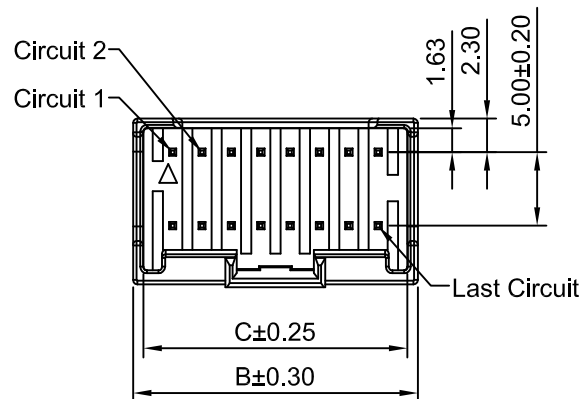

P.C.B LAYOUT
TOLERANCE:±0.05

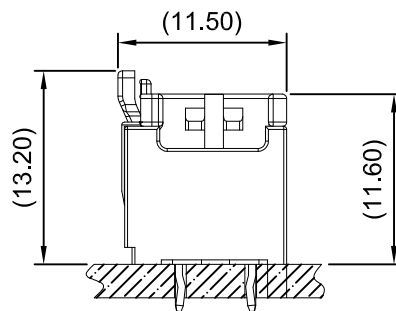


Mated Drawing (REF)

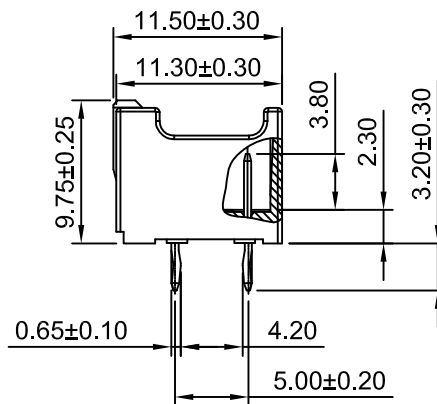

Ordering Information:

- A2011WVA-NF-2xXP - *** - ***
- 1 2 3
- 1.Part NO.
- 2.Color:
(Blank): Natural
BK: Black YL:Yellow
PK:Pink BR:Brown
RD: Red BL:Blue
GN:Green OR:Orange VI:Violet
- 3.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel(Au:1µin[0.03µm] Min)
G3: Gold over Nickel(Au:3µin[0.08µm] Min,Mating Area)
G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)
G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)
G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass
Material: PBT+15%GF,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x4P	6.00	11.40	9.80	2x13P	24.00	29.40	27.80
2x5P	8.00	13.40	11.80	2x14P	26.00	31.40	29.80
2x6P	10.00	15.40	13.80	2x15P	28.00	33.40	31.80
2x7P	12.00	17.40	15.80	2x16P	30.00	35.40	33.80
2x8P	14.00	19.40	17.80	2x17P	32.00	37.40	35.80
2x9P	16.00	21.40	19.80	2x18P	34.00	39.40	37.80
2x10P	18.00	23.40	21.80	2x19P	36.00	41.40	39.80
2x11P	20.00	25.40	23.80	2x20P	38.00	43.40	41.80
2x12P	22.00	27.40	25.80				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1			
DRAWN	CHK'D	APPR	2.00mm Pitch		
Haisen Li	Djankui Wan	Jack Yin	Vertical Dual Row Wafer		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV A1
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
					
		A2011WVA-NF-2xXP			