
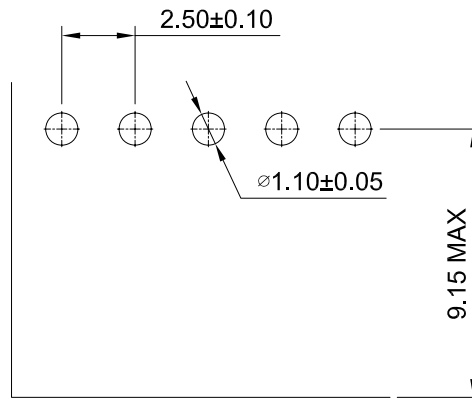
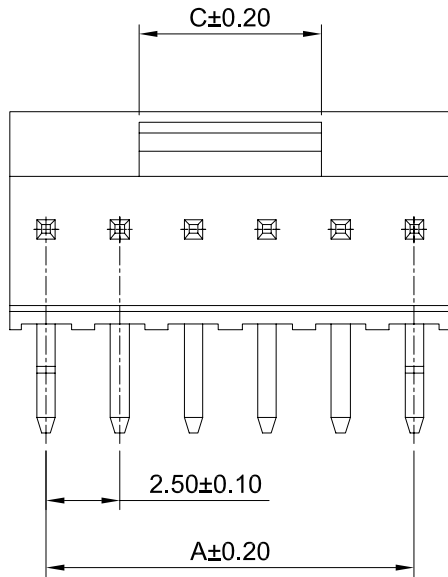
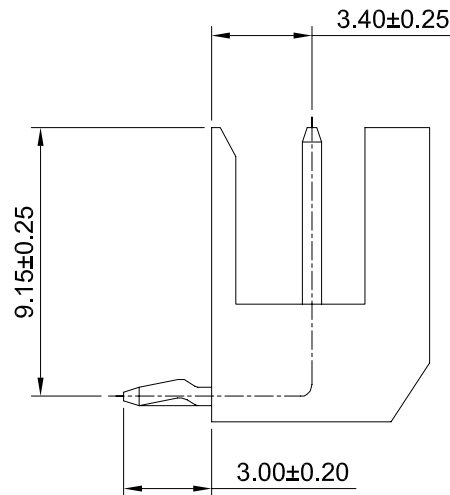


#### SPECIFICATIONS:

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Pin Material: Brass/Tin over Nickel  
 Material: PBT+30%GF,UL94V-0(Pink)

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|-------|-------|----------|----------------|-------|-------|
|          | A              | B     | C     |          | A              | B     | C     |
| 2P       | 2.50           | 5.00  | 2.20  | 9P       | 20.00          | 22.50 | 10.20 |
| 3P       | 5.00           | 7.50  | 3.20  | 10P      | 22.50          | 25.00 | 10.20 |
| 4P       | 7.50           | 10.00 | 5.20  | 11P      | 25.00          | 27.50 | 11.20 |
| 5P       | 10.00          | 12.50 | 5.20  | 12P      | 27.50          | 30.00 | 11.20 |
| 6P       | 12.50          | 15.00 | 6.20  | 13P      | 30.00          | 32.50 | 13.20 |
| 7P       | 15.00          | 17.50 | 8.20  | 14P      | 32.50          | 35.00 | 13.20 |
| 8P       | 17.50          | 20.00 | 10.20 | 15P      | 35.00          | 37.50 | 13.20 |

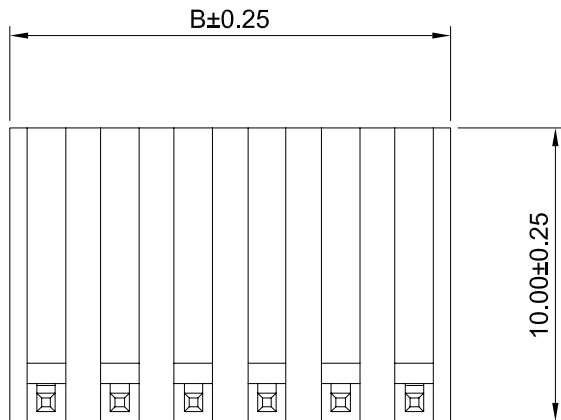

**CJT**conn

CHANGJIANG CONNECTORS CO.,LTD.

| Unit     | Scale | Sheet      |
|----------|-------|------------|
| mm       | 4:1   | 1 of 1     |
| Draw BY: |       | Approved : |
| Tony Su  |       | Jack Yin   |

Title :

2.50mm PITCH

90° WAFER

DRAW NO : A2506WR-XP

REV  
A0

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| A0  | NEW RELEASE | 2005.05.10 |

| General Tolerance |        |
|-------------------|--------|
| x.xx±0.25         | ANGLE± |
| x.xx±0.20         |        |
| x.xxx±0.15        |        |