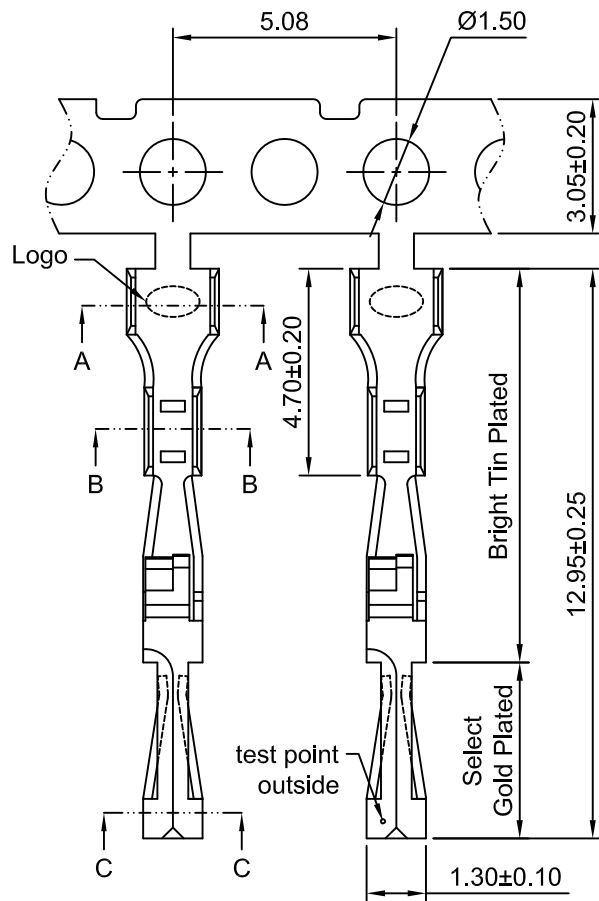


Ordering Information:

A2547-GP - ***
1 2

1.Part NO.


2.Finish:

(Blank): Gold over Nickel (Au:1u"Mating area)


G3: Gold over Nickel (Au:3u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)



G30: Gold over Nickel (Au:30u"Mating area)

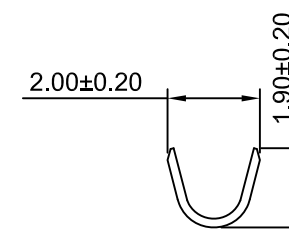

SEC:A-A



SEC:B-B

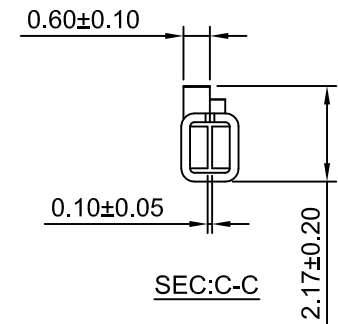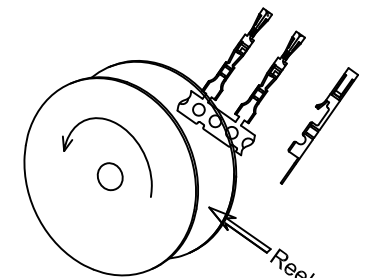

SEC:C-C

Winding Direction

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	2.54mm PITCH CRIMP TERMINAL	
DRWN	CHKD	APPR		
Dengchun Yi	Djankui Wan	Jack Yin		
4	General Tolerances		THIRD ANGLE PROJECTION	
8	x.x±0.25		DRAWING NO.	
	x.xxx±0.20			
6	x.xxxx±0.15			
	ANGLES ±1°		A2547-T	
			REV A2	

Part NO.	Finish			Salt spray/H	Remarks
	Ni / u"	Tin / u"	Au / u"		
A2547-TP	≥30	≥80		24	Bright Tin Plated,Pre-stamping
A2547-GP	≥30	≥80	1	24	Gold Plated Bright Tin,Pre-stamping
A2547-GP-G15	≥30	≥80	15	24	Gold Plated Bright Tin,Pre-stamping

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2547-TP	AWG#22-#24	1.60mm(max)	Phosphor Bronze	Tin over Nickel	15,000 PCS
A2547-GP	AWG#22-#24	1.60mm(max)	Phosphor Bronze	Gold over Nickel	15,000 PCS

A2	CHANGE THE DRAWING	2021.03.24
A1	CHANGE THE DRAWING	2017.12.18
A0	NEW RELEASE	2011.03.26
REV	DESCRIPTION	DATE