


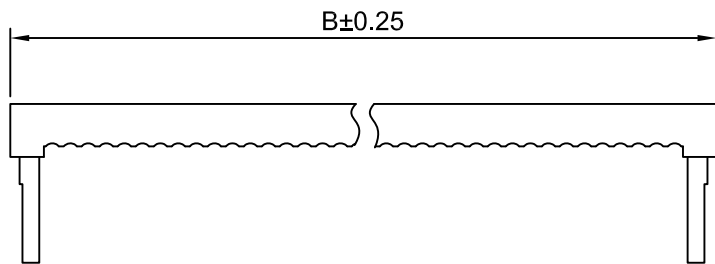



2x7P~2x32P

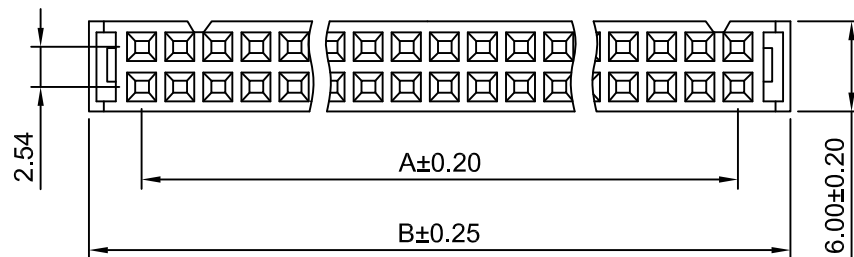

2x4P~2x6P



2x3P

Odering Information:

A2547FC-2xXP-Y - ** - **
1 2 3

- Part No.
- Finish:
(blank) - Tin over Nickel
G - Gold over Nickel
- Color:
(blank) - Black
GY - Gray

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x3P	5.08	12.32	2x13P	30.48	37.72
2x4P	7.62	14.86	2x15P	35.56	42.80
2x5P	10.16	17.40	2x17P	40.64	47.88
2x6P	12.70	19.94	2x18P	43.18	50.42
2x7P	15.24	22.48	2x20P	48.26	55.50
2x8P	17.78	25.02	2x22P	53.34	60.58
2x9P	20.32	27.56	2x25P	60.96	68.20
2x10P	22.86	30.10	2x30P	73.66	80.90
2x11P	25.40	32.64	2x32P	78.74	85.98
2x12P	27.94	35.18			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw By:
Diankui Wan

Approved :
Jack Yin

Title :
2.54mm PITCH

IDC Socket

General Tolerance		
x.x±0.25	PROJECT	
x.xx±0.20		
x.xxx±0.15		

Draw No : A2547FC-2xXP-Y	REV A0
--------------------------	--------

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.07.01