


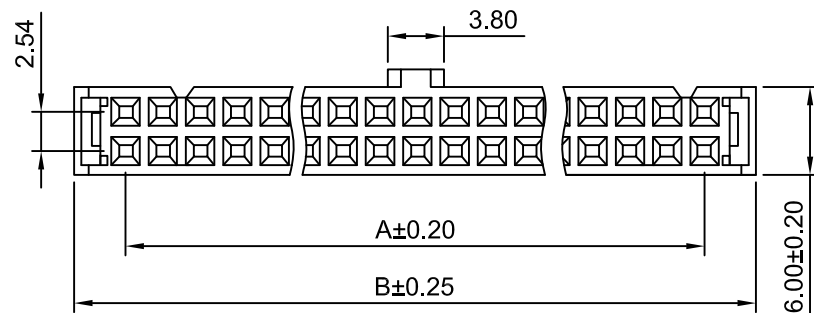
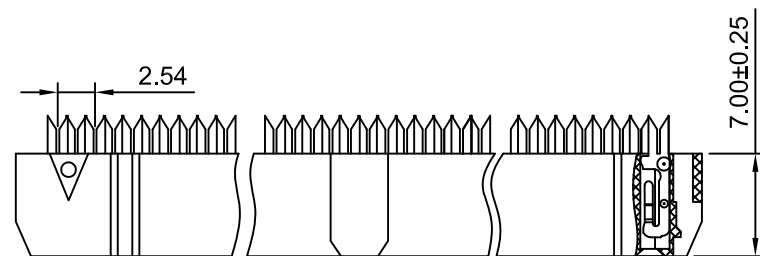


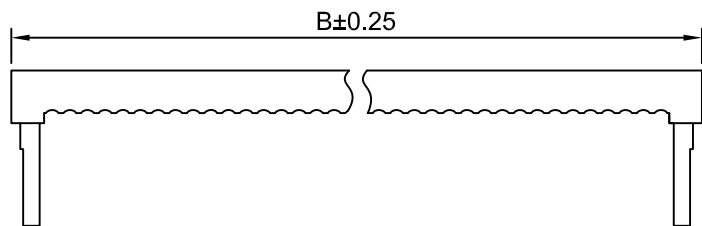



2x7P~2x32P



2x4P~2x6P



2x3P

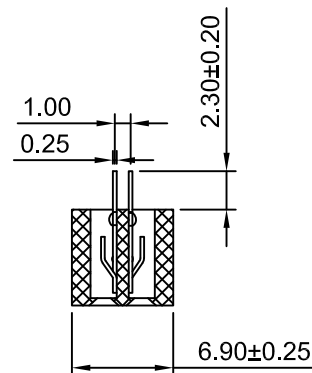

Ordering Information:

A2547FC-N-2xXP - ** _ **
1 2 3

1.Part NO.

2.Color:

(Blank): Black

GY: Gray

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x3P	5.08	12.42	2x16P	38.10	45.44
2x4P	7.62	14.96	2x17P	40.64	47.98
2x5P	10.16	17.50	2x18P	43.18	50.52
2x6P	12.70	20.04	2x19P	45.72	53.06
2x7P	15.24	22.58	2x20P	48.26	55.60
2x8P	17.78	25.12	2x21P	50.80	58.14
2x9P	20.32	27.66	2x22P	53.34	60.68
2x10P	22.86	30.20	2x23P	55.88	63.22
2x11P	25.40	32.74	2x24P	58.42	65.76
2x12P	27.94	35.28	2x25P	60.96	68.30
2x13P	30.48	37.82	2x30P	73.66	81.00
2x14P	33.02	40.36	2x32P	78.74	86.08
2x15P	35.56	42.90			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRAWN	CHK'D	APPR	2.54mm PITCH IDC Socket	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
A1	CHANGE THE DRAWING	2023.07.28	A2547FC-N-2xXP	A1
A0	NEW RELEASE	2005.07.01		
REV	DESCRIPTION	DATE		