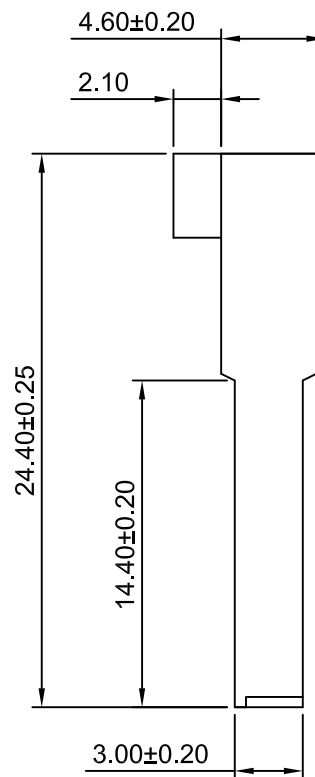


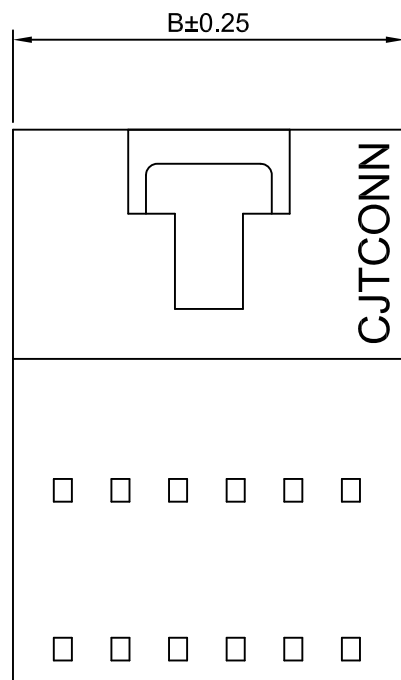
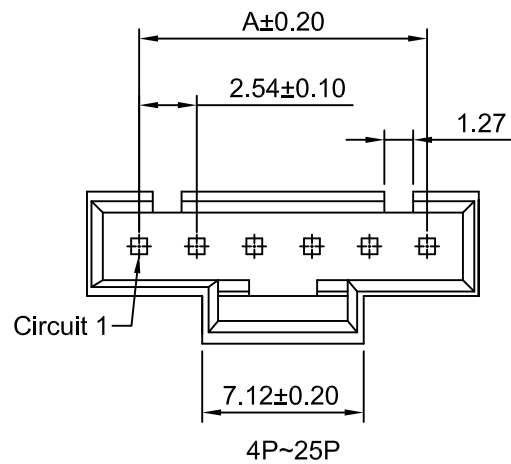


#### SPECIFICATIONS:

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1500V AC/minute  
Material: Nylon 66,UL94V-0(Black)

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 2.54           | 7.12  | 14P      | 33.02          | 37.60 |
| 3P       | 5.08           | 9.66  | 15P      | 35.56          | 40.14 |
| 4P       | 7.62           | 12.20 | 16P      | 38.10          | 42.68 |
| 5P       | 10.16          | 14.74 | 17P      | 40.64          | 45.22 |
| 6P       | 12.70          | 17.28 | 18P      | 43.18          | 47.76 |
| 7P       | 15.24          | 19.82 | 19P      | 45.72          | 50.30 |
| 8P       | 17.78          | 22.36 | 20P      | 48.26          | 52.84 |
| 9P       | 20.32          | 24.90 | 21P      | 50.80          | 55.38 |
| 10P      | 22.86          | 27.44 | 22P      | 53.34          | 57.92 |
| 11P      | 25.40          | 29.98 | 23P      | 55.88          | 60.46 |
| 12P      | 27.94          | 32.52 | 24P      | 58.42          | 63.00 |
| 13P      | 30.48          | 35.06 | 25P      | 60.96          | 65.54 |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

| Unit                                                 | Scale       | Sheet                  |
|------------------------------------------------------|-------------|------------------------|
| mm                                                   | 3:1         | 1 of 1                 |
| DRWN                                                 | CHK'D       | APPR                   |
| Dengchun Yi                                          | Diankui Wan | Jack Yin               |
| General Tolerances                                   |             | THIRD ANGLE PROJECTION |
| x.xx±0.25<br>x.xxx±0.20<br>x.xxxx±0.15<br>ANGLES ±1° |             |                        |

| TITLE                |     |
|----------------------|-----|
| 2.54mm PITCH HOUSING |     |
| DRAWING NO.          | REV |
| A2547HM-XP-66        | A1  |

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| A0  | NEW RELEASE | 2020.08.07 |