

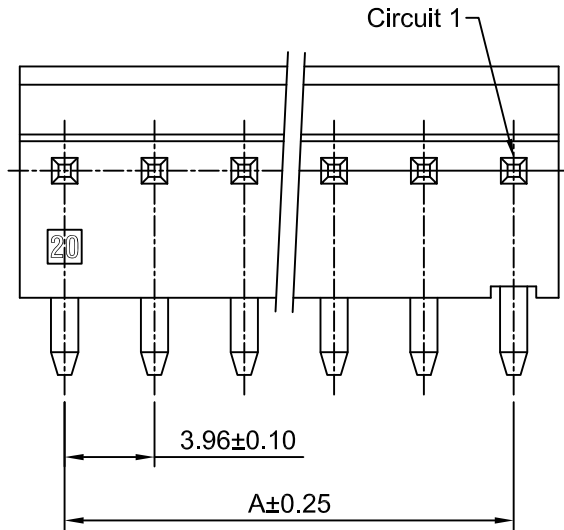
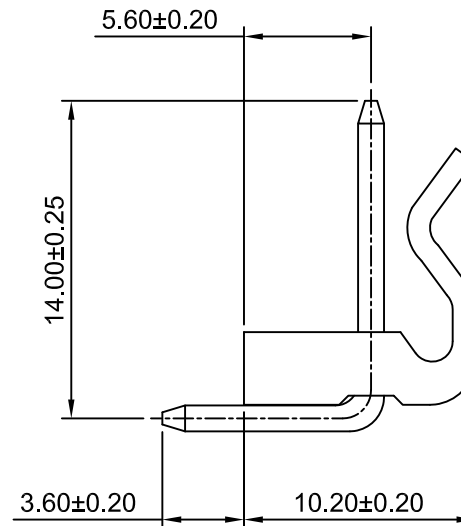


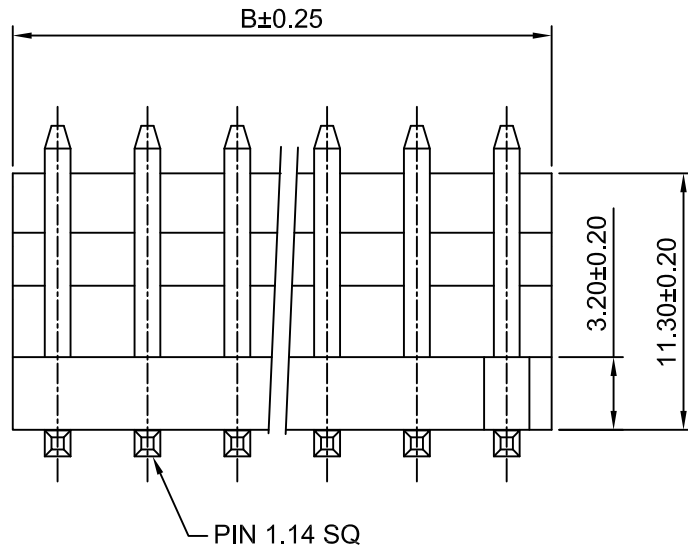

Ordering Information:

A3961WR-XP-L - *** - ** - **
1 2 3 4

- 1.Part No.
- 2.Material:
(blank):Nylon 66,UL94V-2/Natural
V0:Nylon 66,UL94V-0/White
GWT:Nylon 66,UL94V-0,GWT 750°C
- 3.Color:
(blank):Natural/White
RD:Red
- 4.Finish:
(blank):Tin over Nickel
G:Gold over Nickel



SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	14P	51.48	55.44
3P	7.92	11.88	15P	55.44	59.40
4P	11.88	15.84	16P	59.40	63.36
5P	15.84	19.80	17P	63.36	67.32
6P	19.80	23.76	18P	67.32	71.28
7P	23.76	27.72	19P	71.28	75.24
8P	27.72	31.68	20P	75.24	79.20
9P	31.68	35.64	21P	79.20	83.16
10P	35.64	39.60	22P	83.16	87.12
11P	39.60	43.56	23P	87.12	91.08
12P	43.56	47.52	24P	91.08	95.04
13P	47.52	51.48			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 3.96mm Pitch					
mm		3:1		1 of 1							
Draw By:				Approved :				90° Wafer			
Diankui Wan				Jack Yin							
General Tolerance						PROJECT					
1		x.x±0.25									
0		x.xx±0.20									
REV		x.xxx±0.15				DRAW NO : A3961WR-XP-L				REV A1	