

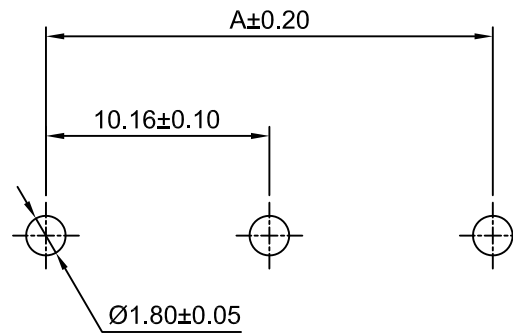
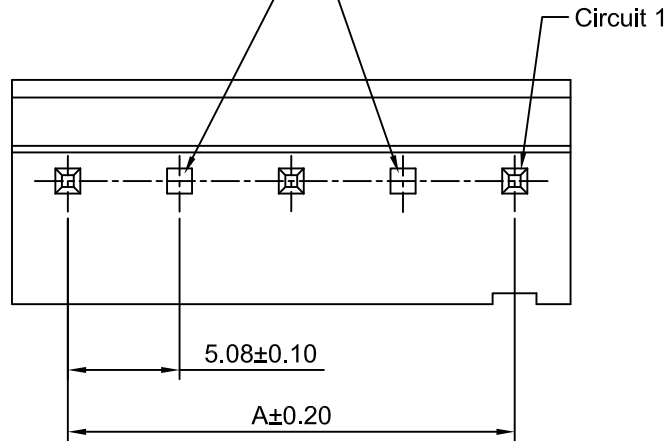


Even Circuit empty

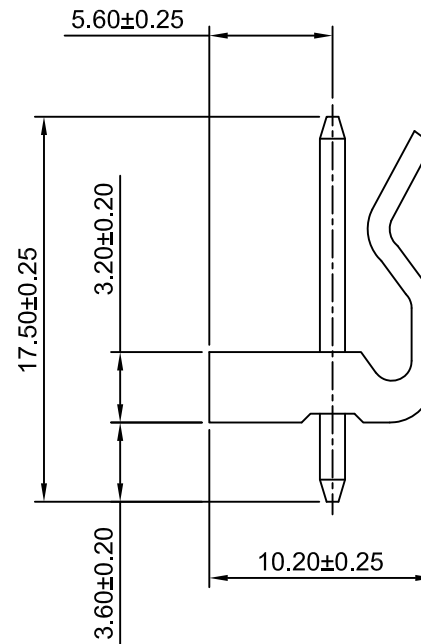

P.C.B LAYOUT

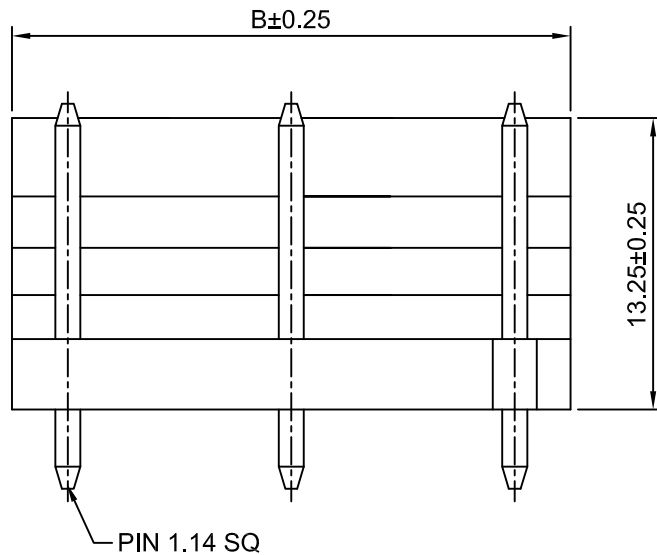

Ordering Information:

A5081WV-XP-A - **
1 2

1:Part NO.

2:Color:

(Blank):Natural

BK:Black

RD :Red

BL:Blue

YL:Yellow

GN:Green

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	10.16	15.24	13P	60.96	66.04
5P	20.32	25.40	15P	71.12	76.20
7P	30.48	35.56	17P	81.28	86.36
9P	40.64	45.72	19P	91.44	96.52
11P	50.80	55.88			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 1		5.08mm PITCH VERTICAL WAFER	
DRAWN		CHK'D		APPR			
Chengbiao Ye		Djankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO.	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°						REV A0	
A5081WV-XP-A							