

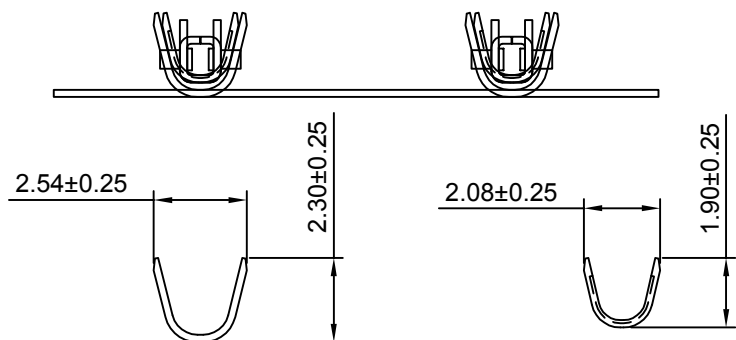
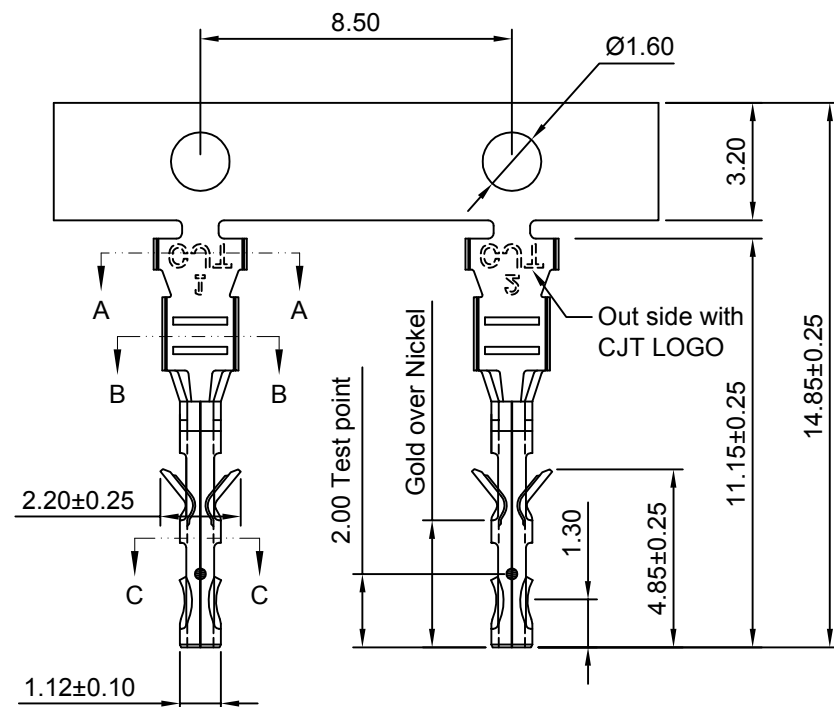




SEC:A-A

SEC:B-B

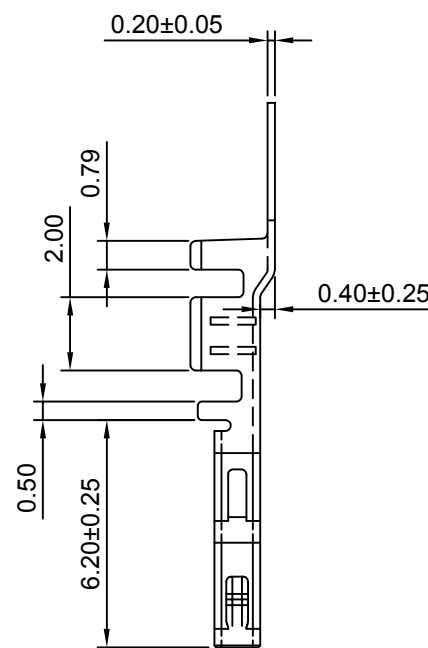

SEC:C-C

Ordering Information:
C3030F - *** - D - ***
1 2 3

1.Part NO.

2.Material:

GP: Phosphor Bronze

GCA: High conductive copper alloy


3.Finish:

(Blank): Gold over Nickel (Au:1u")

G10: Gold over Nickel (Au:10u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)

G30: Gold over Nickel (Au:30u"Mating area)

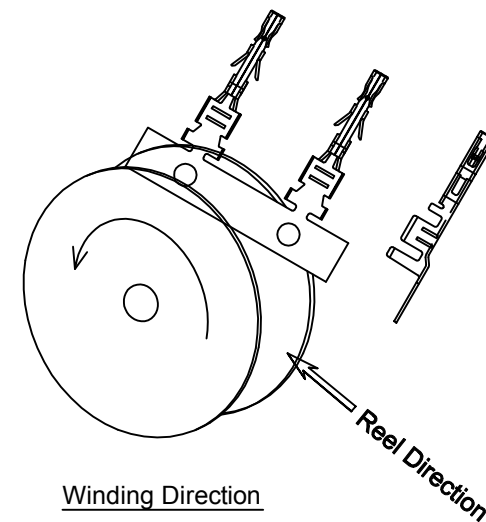

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
C3030F-TP-D	AWG#20-#24	2.00mm(max)	Phosphor Bronze	Tin over Nickel	8,000 PCS
C3030F-GP-D	AWG#20-#24	2.00mm(max)	Phosphor Bronze	Gold over Nickel	8,000 PCS
C3030F-TCA-D	AWG#20-#24	2.00mm(max)	High conductive copper alloy	Tin over Nickel	8,000 PCS
C3030F-GCA-D	AWG#20-#24	2.00mm(max)	High conductive copper alloy	Gold over Nickel	8,000 PCS

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 3.00mm PITCH CRIMP TERMINAL	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C3030F-T-D	REV A1
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				
				

A1	MODIFY DRAWING	2022.12.23
A0	NEW RELEASE	2020.05.10
REV	DESCRIPTION	DATE