

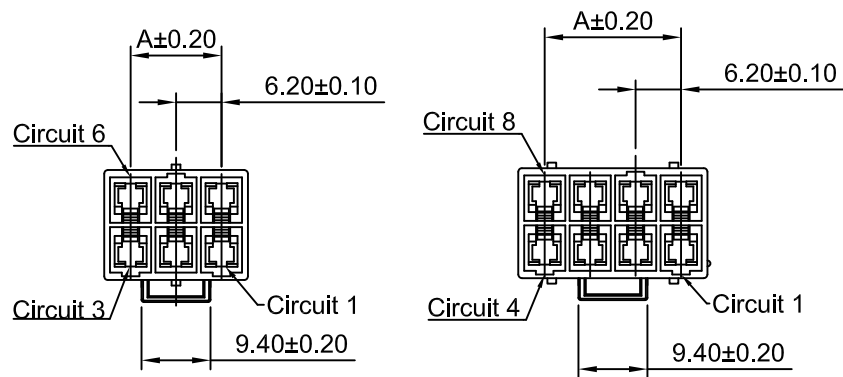


2x2P~2x3P



2x4P~2x6P

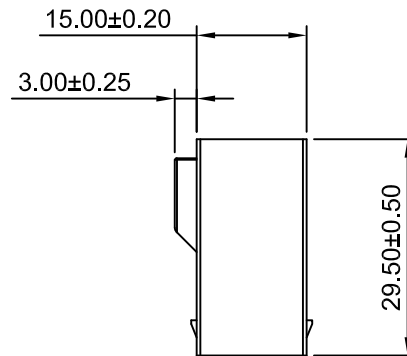

SPECIFICATIONS:

Current Rating:20A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 7mΩMax.

Insulation Resistance: 100MΩMin.

Withstanding Voltage: 2000V AC/minute

Material:Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	6.20	13.40	2x4P	18.60	25.80
2x3P	12.40	19.60	2x6P	31.00	38.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

	Unit	Scale	Sheet	TITLE				
	mm	1.5:1	1 of 1					
	DRAWN	CHK'D	APPR	6.20mm PITCH HOUSING				
	Wenmin Luo	Diankui Wan	Jack Yin					
0	General Tolerances x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		THIRD ANGLE PROJECTION 		DRAWING NO. C6201HMA-2xXP		REV A2	
6								
3								

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2023.06.20
A1	CHANGE THE DRAWING	2021.10.06
A0	NEW RELEASE	2015.04.23